


BALL GUIDES - LOAD DIAGRAM

Bearing life versus loading

Values shown are based on the Impact Factor of $f_s = 1$:

Application to normal conditions in respect of press and die set, with a maximum bearing temperature of 100 °C.

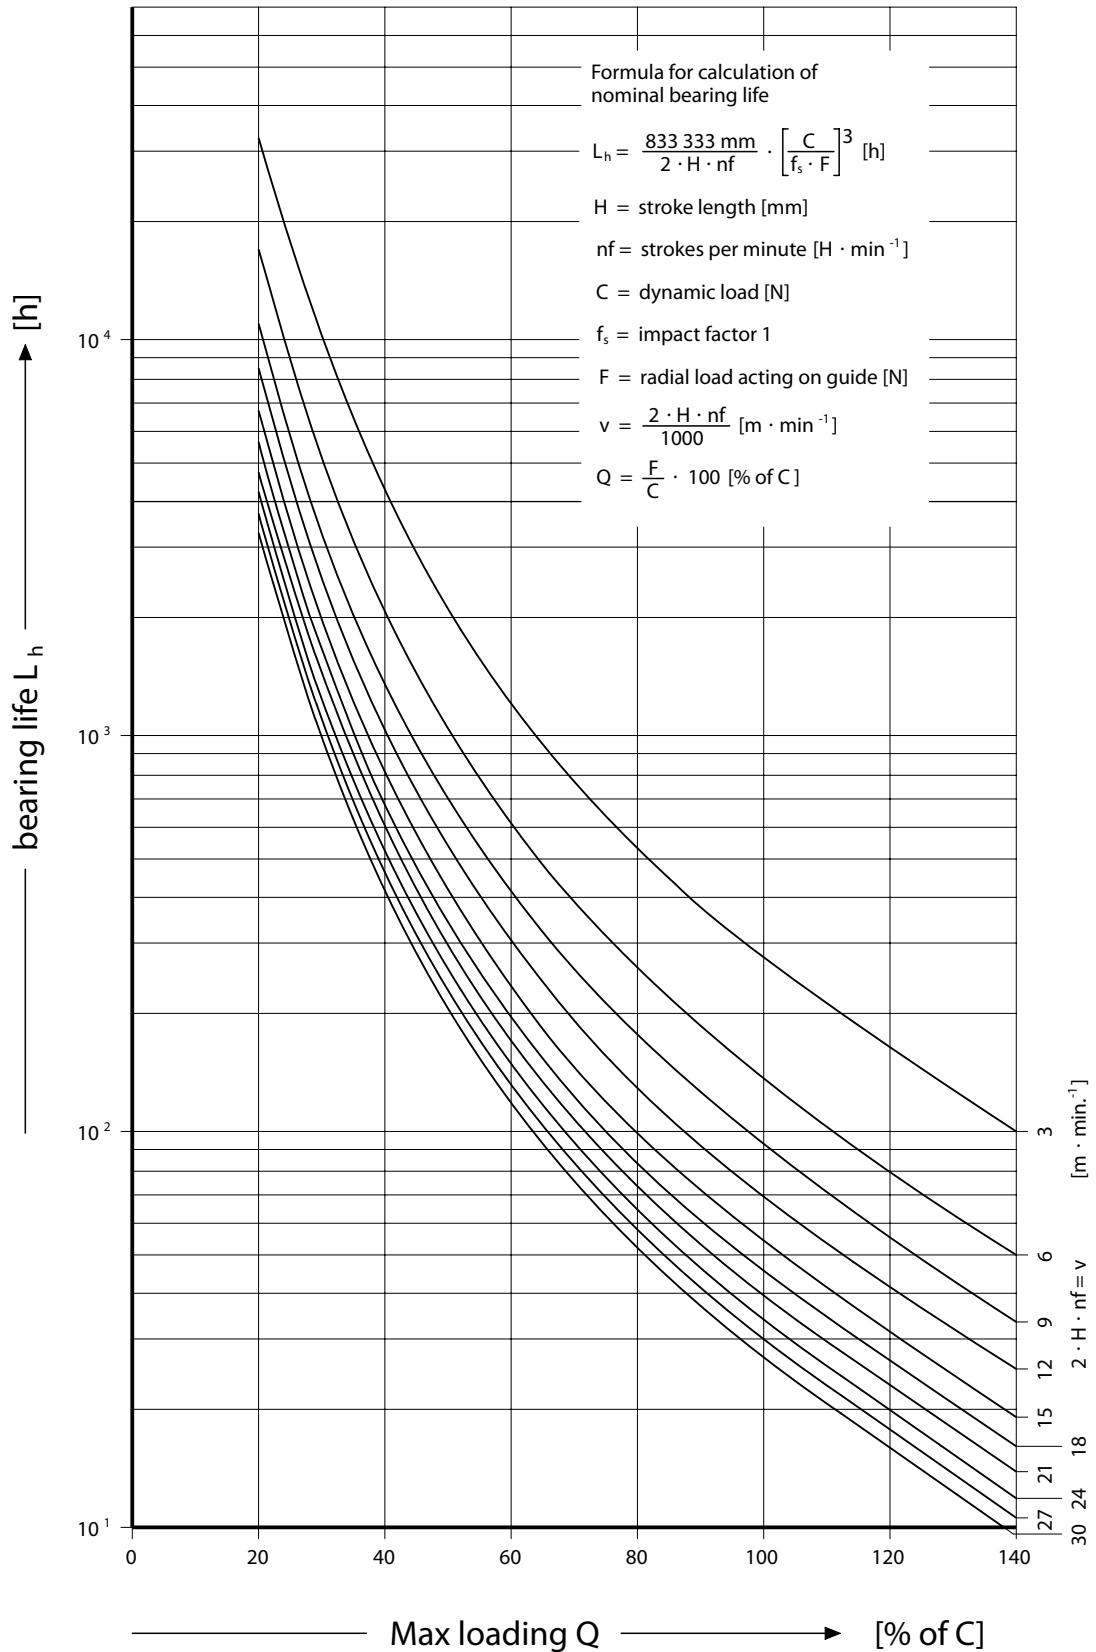

BALL GUIDES - CALCULATION TABLE

DYNAMIC LOAD FIGURES FOR BALL, BRASS OR ALUMINIUM

Definition:

The dynamic load index C in N constitutes a load with constant size and direction, at which 90 % of a sufficiently large quantity of equal bearings achieve a minimum of the service life of $+10^5$ m. This applies for solely longitudinal movement.

Pillar- \varnothing d ₁	Cage length l ₁	Dynamic Load Index C for whole cage (N)	Pillar- \varnothing d ₁	Cage length l ₁	Dynamic Load Index C for whole cage (N)	Pillar- \varnothing d ₁	Cage length l ₁	Dynamic Load Index C for whole cage (N)
8	40	750	24	120	9300	48	105	17100
10	24	1070	25	31	3200	48	120	19000
10	28	1190	25	40	3900	48	140	21400
10	31	1300	25	45	4200	48	160	23600
10	40	1830	25	50	4850	48	180	26000
10	45	1830	25	56	5200	48	200	28000
10	50	1930	25	63	5700	48	240	32000
10	56	2210	25	71	6300	50	50	9400
11	24	1090	25	80	6900	50	56	10200
11	28	1210	25	95	7900	50	63	11700
11	31	1330	25	105	8400	50	71	12500
11	40	1660	25	120	9300	50	80	13900
11	45	1860	30	40	5700	50	95	15900
11	50	1960	30	45	6400	50	105	17200
11	56	2250	30	50	7000	50	120	19100
12	24	1100	30	56	7600	50	128	19700
12	28	1230	30	63	8800	50	140	21400
12	31	1350	30	71	9300	50	160	23700
12	40	1680	30	75	9800	50	180	26000
12	45	1890	30	80	10400	50	200	28000
12	50	1990	30	95	11900	50	240	32000
12	56	2280	30	105	12800	60	80	15500
15	24	1880	30	120	14200	60	95	17700
15	28	2200	30	140	16000	60	105	19200
15	31	2500	30	160	17700	60	120	21300
15	45	3300	32	40	5800	60	140	23900
15	40	3050	32	45	6400	60	160	26500
15	50	3800	32	50	7100	60	180	29000
15	56	4050	32	56	7700	60	200	31000
15	63	4550	32	63	8800	60	240	35500
15	71	4950	32	71	9400	63	80	15500
16	24	1910	32	75	9900	63	95	17800
16	28	2230	32	80	10500	63	105	19300
16	31	2550	32	95	12000	63	120	21300
16	40	3100	32	105	12900	63	140	24000
16	45	3350	32	120	14300	63	160	26500
16	50	3850	32	140	16100	63	180	29000
16	56	4100	32	160	17800	63	200	31500
16	63	4600	38	45	7500	63	240	35500
16	71	5000	38	50	8200	80	120	41000
19	24	2300	38	56	8900	80	140	46500
19	28	2700	38	63	10300	80	160	52000
19	31	3050	38	71	10900	80	180	57000
19	40	3750	38	80	12100	80	200	62000
19	45	4050	38	95	13900	80	240	70000
19	50	4350	38	105	15000			
19	56	4950	38	120	16700			
19	63	5500	38	140	18700			
19	71	6100	38	160	20700			
19	80	6600	38	180	22600			
19	95	7600	38	200	24400			
20	24	2320	38	240	28000			
20	28	2700	40	45	7500			
20	31	3100	40	50	8200			
20	40	3750	40	56	9000			
20	45	4100	40	63	10300			
20	50	4400	40	71	11000			
20	56	5000	40	80	12200			
20	63	5600	40	95	14000			
20	71	6100	40	105	15100			
20	80	6600	40	120	16700			
20	95	7600	40	140	18800			
24	31	3150	40	160	20800			
24	40	3850	40	180	22700			
24	45	4200	40	200	24600			
24	50	4850	40	240	28000			
24	56	5100	48	50	9400			
24	63	5700	48	56	10200			
24	71	6300	48	63	11700			
24	80	6800	48	71	12400			
24	95	7800	48	80	13800			
24	105	8300	48	95	15900			

BALL GUIDES - CALCULATION TABLE

DYNAMIC LOAD FIGURES FOR RECIRCULATING BALL BUSH

Definition:

The dynamic load index C in N constitutes a load with constant size and direction, at which 90 % of a sufficiently large quantity of equal bearings achieve a minimum of the service life of $+10^5$ m. This applies for solely longitudinal movement.

Pillar- \varnothing d ₁	Cage length l ₁	Dynamic Load Index C for whole cage (N)	Pillar- \varnothing d ₁	Cage length l ₁	Dynamic Load Index C for whole cage (N)
20	47	2080	40	95	7600
25	60	2960	50	95	8800
32	77	5450	63	120	11800